



StarQuat™ Quaternary Ammonium Salts

StarChem, LLC quaternary amines are based on the reaction of a variety of tertiary amines with benzyl chloride, diethyl sulphate, chlorinated carboxylic acids, and other alkylating agents. Our StarQuat products come in a variety of diluents that can be customized according to the customer's needs: water, isopropanol, methanol, ethanol, and other solvents. If you have questions about chemistries or technologies not listed in this guide please feel free to contact us with your inquiry.


Applications:

- Corrosion inhibitors
- Softeners & debonders
- Anti-static agent
- Disinfectant
- Flow modification
- Cationic emulsification
- Clay treatment
- Catalyst

StarChem Quaternary Amines	
Products	Description
StarQuat BAP 75	100% active fatty imidazoline ethyl sulfate quat.
StarChem BTMAC 60	Trimethyl benzyl ammonium chloride in water. Currently available in 60% concentrations
StarQuat ESL	60% triethyl benzyl ammonium chloride in water. Currently available in 60% concentrations
StarQuat F-669	Ethoxylated tallow ammonium ethyl sulfate.
StarSoft FPC	15% Fatty amide quat. Also available in 100% flakes (StarSoft UKS)
StarQuat LBAC 80	80% Coco dimethyl benzyl ammonium chloride in water and methanol. Also available in a IPA, ethanol and other solvents and concentrations.
StarQuat T-85	82% 12-14 alkyl dimethyl benzyl ammonium chloride in water and isopropanol. Also available in a 50% aqueous solution.
StarChem 2698	99% active fatty amide ethyl sulfate quat.

Application Recommendations:		
Application	Product	Application Description
Corrosion inhibitors	StarQuat BAP 75 StarQuat LBAC 80 StarQuat T-85	Corrosion is a chemical process that has a detrimental effect on equipment and materials commonly used in many industries. StarChem produces several technologies that are used to limit or prevent the effect corrosion has on these materials.
Antistatic agent	StarChem BTMAC 60. StarQuat ESL Conc. StarQuat F-669	These compounds are used in the treatment of materials or their surfaces in order to reduce or eliminate build up of static electricity. Its role is to make the surface or the material itself slightly conductive, either by being conductive itself, or by absorbing moisture from the air.
Softeners, debonders & lubricants	StarQuat F-669 StarSoft FSO StarChem 2698	Quaternary softeners separate themselves from other types of softeners in several key areas. Quaternary softeners can be applied by saturation as well as by exhaustion procedures and are extremely efficient softeners, imparting a very soft, fluffy, smooth hand at low levels of chemical. The handle and drape achieved with a quaternary softener is surpassed by few. Like other types of softeners, quats can improve tear strength, abrasion and sewability.
Clay Treatment (other inorganic materials)	StarQuat BTMAC StarQuat ESL StarQuat LBAC 80	Organoclay is an organically modified phyllosilicate, derived from a naturally occurring clay mineral. By exchanging the original interlayer cations for organocations (typically quaternary alkylammonium ions or quats) an organophilic surface is generated. Organoclay can be used to remove oil from water, as a component in paint formulations or as a viscosifier for oil-based drilling fluids
Cationic Emulsifiers	StarQuat T-85 StarChem 2698 StarQuat F-669	Emulsifiers allow two immiscible liquid phases to be compounded into mixtures. These product can be further categorized by their physical properties, such as; foaming, electrolyte stability, pH stability, wetting performance, emulsification, and hydrotropic properties.
Catalysts	StarQuat BTMAC StarQuat ESL	Phase transfer catalysis (PTC) is the rate enhancement of a reaction between reactants located in different phases (immiscible liquids or solid and liquid) by the addition of a of a PTC that extracts one of the reactants across the interface into the other phase so that reaction can proceed.

Surface Active Properties							
Product	Water Based	Electrolyte Stability	Foaming	Hydrotrope	Acid Cleaners	Alkaline Systems (pH<12)	Thermal Stability
StarQuat T-85	✘	Good	Fair	✘	✘	✘	>150 C
StarSoft 2669	✘	Good	Good	✘	✘	✘	>150 C
StarQuat LBAC 80	✘	Good	Good	✘	✘	✘	>150 C
StarQuat F-669	✘	Good	Best	✘	✘	✘	>150 C
StarQuat BAP 75		Fair	Fair	✘		✘	>200 C

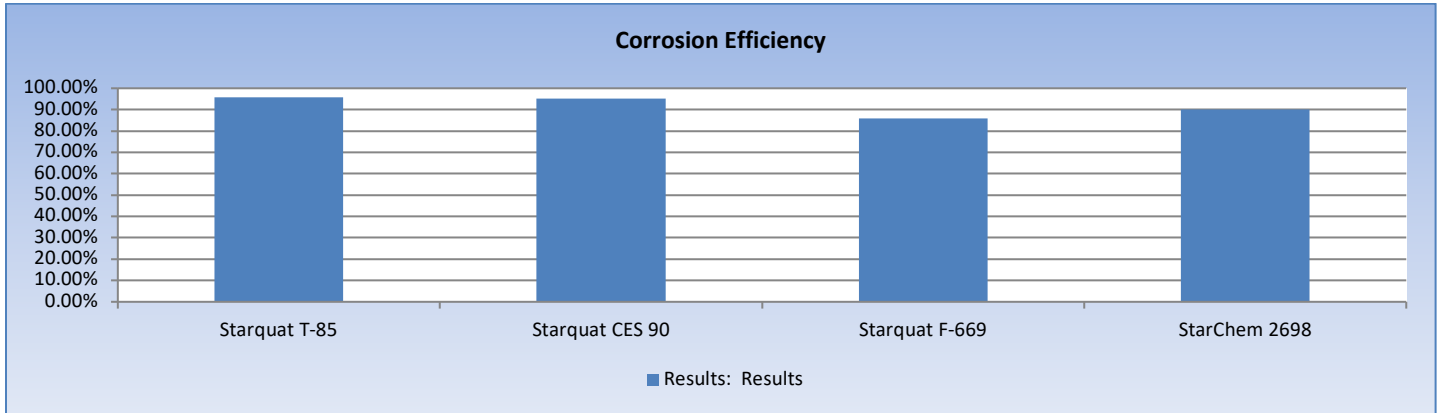

Testing performed on mild steel in HCl solution. Products were tested at 2 ppm.

Corrosion efficiency calculated:

$(\% \text{ weight loss of control}) - (\% \text{ weight loss of inhibited}) \times 100 / \% \text{ weight loss of control}$

StarChem, LLC · 10150 Greenville Highway · Wellford, SC 29385 · Phone: 1-800-677-3500

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written, or by way of production evaluations), including any suggested formulations and recommendations is beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by StarChem. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release StarChem from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind StarChem. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent.